


NEW 2026

LEDIMEX

ABOUT MIRRORS

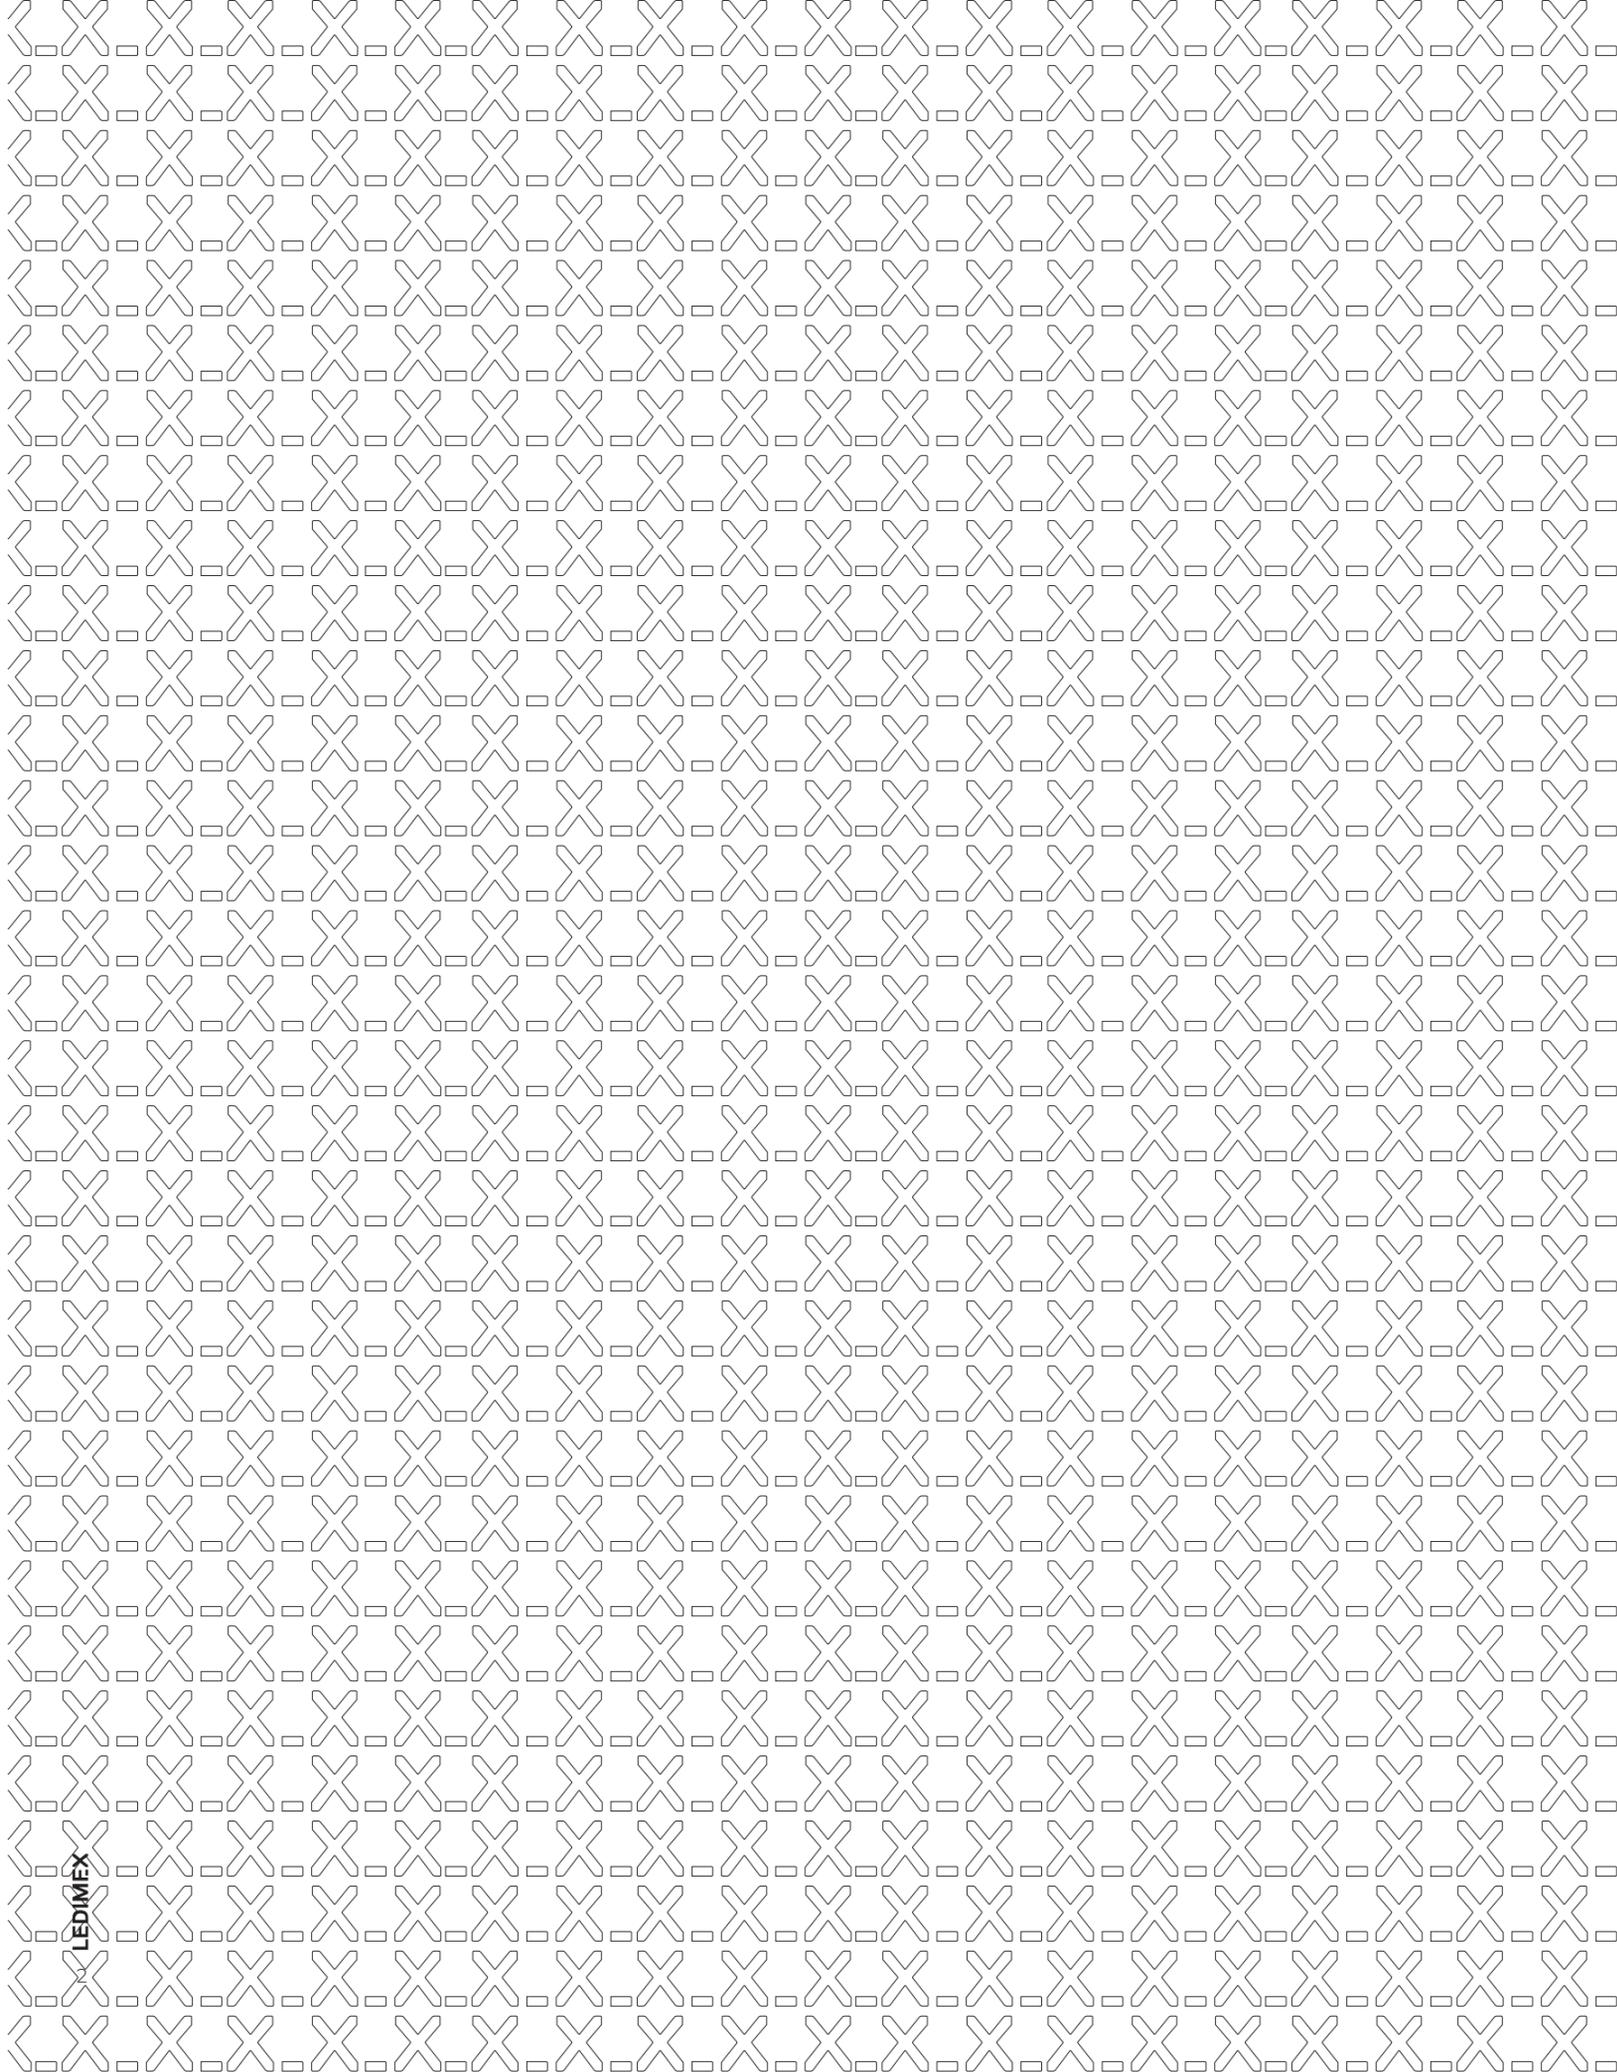

**about
mirrors.**

The MIX&MATCH rule combines the products from Sb_X, Imex, Medimex and Ledimex to create interiors with personality.

BE
YOU
BE
DIFFERENT.
IMEX ABOUT HELPING YOU

MEDIMEX
PRACTIC SERIES
Hanger
CHROME / BGM / BRUSHED
ROSE GOLD

IMEX
LINE SERIES
High basin faucet
BLACK GUN METAL

LEDIMEX
PARIS SERIES
Round mirror
BRUSHED ROSE GOLD


MEDIMEX
TIME SERIES
Towel rack
BLACK GUN METAL

MEDIMEX
TIME SERIES
Roll holder
BRUSHED ROSE GOLD

IMEX
OLIMPO SERIES
Basin faucet
BRUSHED ROSE GOLD

SB_X
STYLO SERIES
Shower enclosure
BLACK GUN METAL / BRUSHED ROSE GOLD

LEDIMEX
ABILITY SERIES
Square mirror
MATT BLACK

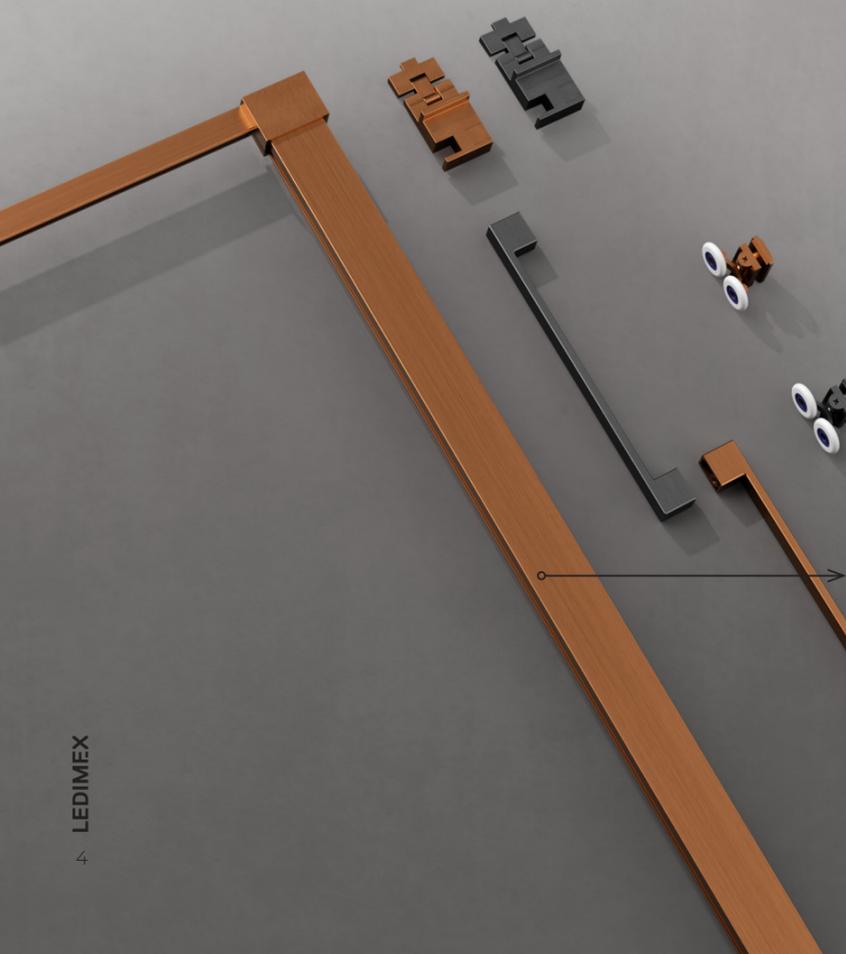

Beautiful, inexpensive and very well-made mirrors.

1. Thickness 5mm

WE EXCEED THE USUAL 3 MM THICKNESS OF THE MIRRORS.

2. Copper-free silver

MORE ENVIRONMENTALLY FRIENDLY AND RUST RESISTANT MANUFACTURING PROCESS.

* "TOP COAT", LEAD-FREE, ENVIRONMENTALLY FRIENDLY PROTECTIVE PRIMER.

3. Safety glass

MORE DIFFICULT TO BREAK AND IN CASE OF BREAKAGE, THE GLASS REMAINS ATTACHED.

4. LEDs IRC > 80

HIGH COLOUR RENDERING LEDs WITH SILICONE COATING. HOMOGENEOUS LIGHT.

5. IP44 protection

POWER SUPPLY SPLASH PROTECTION RATING IN ACCORDANCE WITH STANDARDS.

6. Aluminium pre-frame

LOCATED ON THE BACK OF THE MIRROR, ABSORBS THE HEAT EMITTED BY THE LED DIODE AND PROVIDES GREATER DURABILITY.

7. 120 diodes/lm

TOTAL NUMBER OF LED LIGHTS, IN DIODES, PER LINEAR METRE.

8. Secure packaging

PACKAGING THAT ENSURES MAXIMUM PRODUCT PROTECTION.

Voluntary recycling

WE TAKE CARE OF THE COLLECTION AND MANAGEMENT OF PACKAGING WASTE FOR RECYCLING OR RECOVERY.



PRODUCT VALUES

1.

GLASS THICKNESS 5MM SAFETY GLASS

2.

ACRYLIC FRAME LIGHTED

3.

PERIMETER LIGHT IN FRAME 3-LED. TYPES OF LIGHT: WARM, NEUTRAL, COLD

4.

COPPER-FREE SILVER-PLATED GLASS ENVIRONMENTALLY FRIENDLY

10.

ALUMINIUM PRE-FRAME (LOCATED AT THE BACK OF THE MIRROR) ABSORBS THE HEAT EMITTED BY THE LED

5.

REINFORCED PACKAGING SAFETY AND SECURITY

9.

ALUMINIUM FRAME MATT BLACK

8.

120 DIODES/LM TOTAL NUMBER OF LED LIGHTS, IN DIODES, PER LINEAR METRE

7.

ON / OFF LIGHTING TOUCH SENSOR

6.

ON / OFF ANTI-FOGGING TOUCH SENSOR



Catania

SQUARE MIRROR
BACKLIGHT AND PERIMETER LIGHT
INSIDE THE FRAME



3-Led



Catania



Catania

PRODUCT VALUES

1.

GLASS THICKNESS 5MM SAFETY GLASS

2.

ALUMINIUM FRAME IN 6 FINISHES: BLACK GUN METAL, MATT BLACK, MATT WHITE, BRUSHED NIKEL, BRUSHED GOLD & BRUSHED ROSE GOLD

3.

BACKLIGHT AND PERIMETER LIGHT IN FRAME 3-LED. TYPES OF LIGHT: WARM, NEUTRAL, COLD

7.

ON / OFF LIGHTING INTENSITY CONTROL CONCEALED SENSOR

6.

ANTI-FOGGING INCORPORATED

5.

COPPER-FREE SILVER-PLATED GLASS ENVIRONMENTALLY FRIENDLY


4.

120 DIODES/LM TOTAL NUMBER OF LED LIGHTS, IN DIODES, PER LINEAR METRE

Catania

SQUARE MIRROR | BACKLIGHT AND PERIMETER LIGHT INSIDE THE FRAME

PROFILE DETAILS

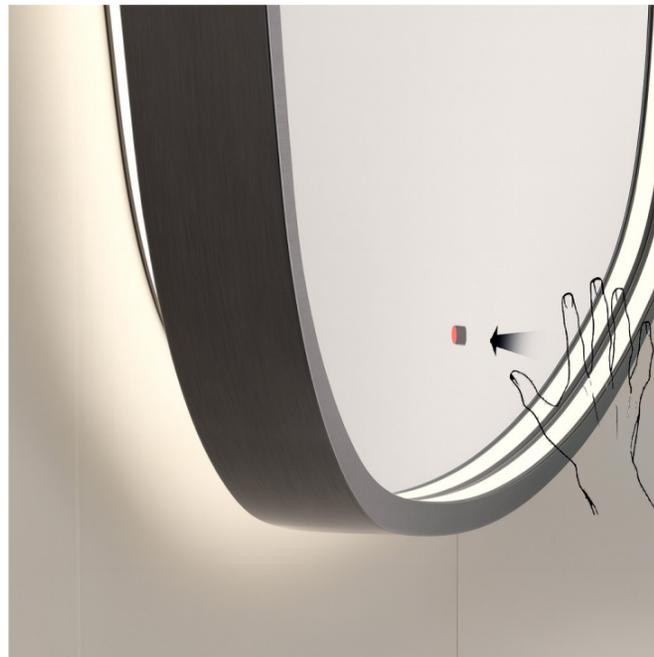

DETAIL OF REAR LIGHTING AND INNER PERIMETER OF THE FRAME



FRAME DEPTH (1.7CM)

DESCRIPTION

-  Anti-fog sensor
-  ON/OFF sensor
-  Dimmer
-  3-Led: warm, neutral and cold light
-  Reinforced packaging

Square mirror with rounded edges.
 Backlit light and light around the inner perimeter of the frame.
 Aluminium frame available in six finishes:
 black gun metal, matt white, matt black, brushed nickel, brushed gold and brushed rose gold.
 Single sensor: Lighting ON/OFF and intensity adjustment.
 Built-in ANTI-FOG system.
 3-LED technology. Three types of light (warm 3,000K, neutral 4,000K and cool 6,500K).



WARM LIGHT 3.000K NEUTRAL LIGHT 4.000K COLD LIGHT 6.500K

FINISHES (6 OPTIONS)



MATT BLACK



MATT WHITE



BRUSHED NICKEL



BLACK GUN METAL



BRUSHED GOLD





BRUSHED ROSE GOLD

Catania

SQUARE MIRROR | BACKLIGHT AND PERIMETER LIGHT INSIDE THE FRAME

TECHNICAL SCHEME

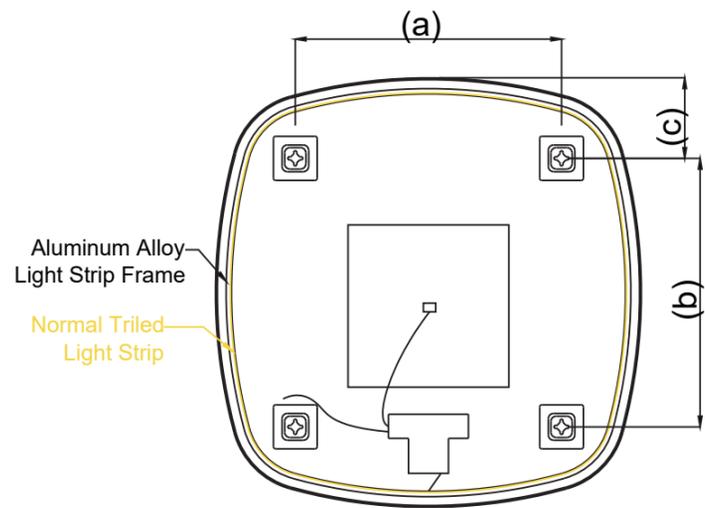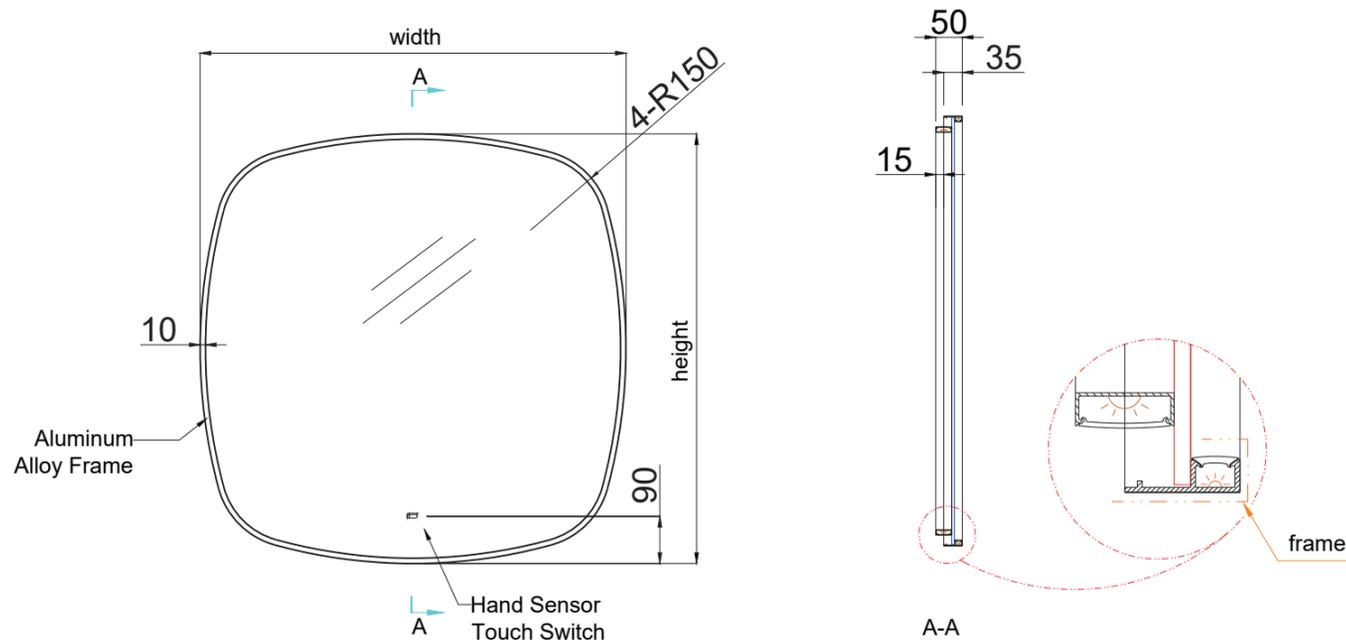


ANTI-FOG PLATE MEASUREMENTS

REF.	MEASURES	(mm)
CATA042/80	800x800MM	(300x300)
CATA042/100	1000x800MM	(550x350)


ANCHOR DIMENSIONS

REF.	MEASURES	(a)	(b)	(c)
CATA042/80	800x800MM	(500)	(500)	(150)
CATA042/100	1000x800MM	(635)	(450)	(275)

SENSOR DETAIL



FINISHES | REFERENCES | DIMENSIONS

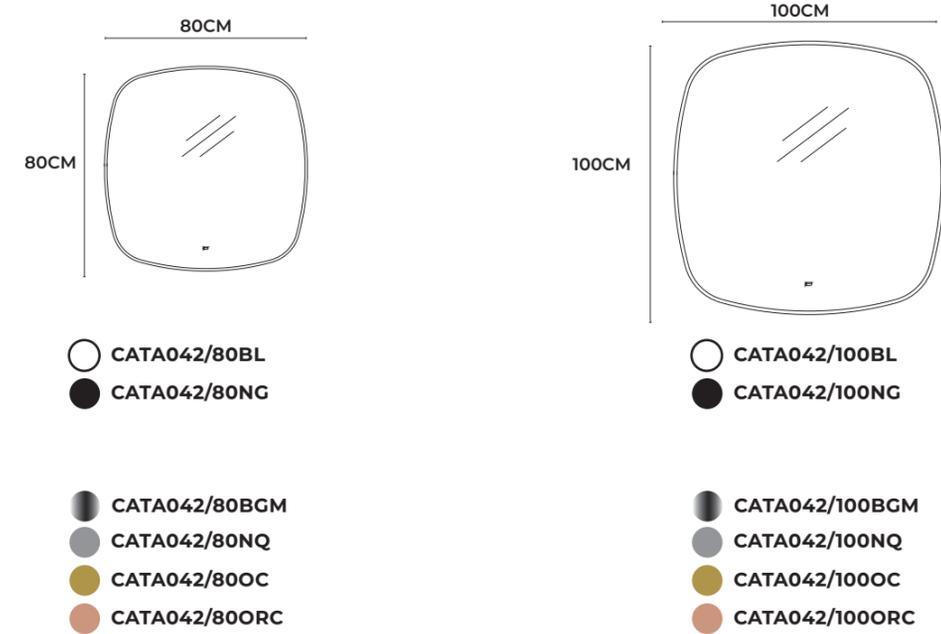

COMMON TECHNICAL DATA

Guarantee	3 YEARS
Energy classification	F+
Estimated useful life	50.000 hours
European legislation	CE, ROHS, IP44
Power (V)	220-240V / 50-60Hz
Kelvin	3.000K / 4.000K / 6.500K

TECHNICAL DATA BY REFERENCE

EAN	REFERENCE	WEIGHT(KG) with packaging	LUMENS	POWER
8435668070119	CATA042/80BGM	10,95	1860	36W
8435668070751	CATA042/80BL	10,95	1860	36W
8435668070126	CATA042/80NG	10,95	1860	36W
8435668070133	CATA042/80NQ	10,95	1860	36W
8435668070140	CATA042/80OC	10,95	1860	36W
8435668070157	CATA042/80ORC	10,95	1860	36W
8435668070065	CATA042/100BGM	15,50	2020	60W
8435668070744	CATA042/100BL	15,50	2020	60W
8435668070072	CATA042/100NG	15,50	2020	60W
8435668070089	CATA042/100NQ	15,50	2020	60W
8435668070096	CATA042/100OC	15,50	2020	60W
8435668070102	CATA042/100ORC	15,50	2020	60W

Bari

ELLIPTICAL MIRROR
LIGHT IN ILLUMINATED FRAME



6.500K



Bari



Bari


PRODUCT VALUES



Bari

ELLIPTICAL MIRROR | LIGHT IN ILLUMINATED FRAME

DETAILS

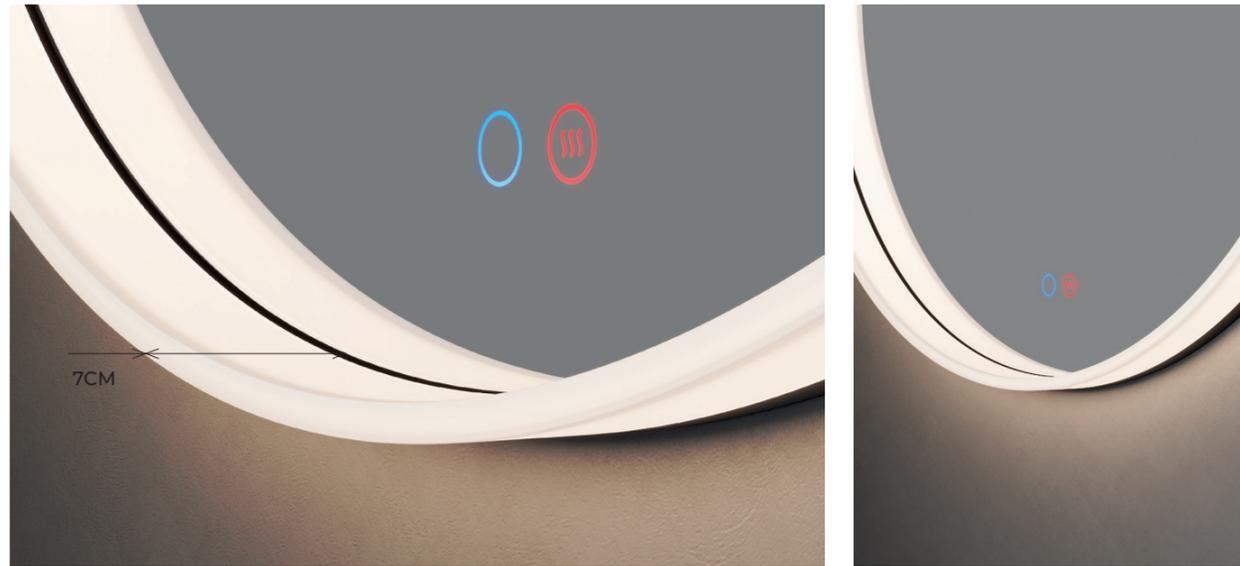

ACRYLIC FRAME (4,5CM) + SENSORS (ILLUMINATION + ANTI-FOG)

BLACK ALUMINIUM FRAME (2,5CM)

DESCRIPTION



Elliptical mirror with illuminated acrylic frame.
 Double frame: acrylic and aluminium in a matt black finish.
 Aluminium subframe on the back of the mirror.
 Sensors: ON/OFF lighting and ANTI-FOG system.
 3-LED technology. Three types of light (warm 3,000K, neutral 4,000K and cool 6,500K).




WARM LIGHT 3.000K NEUTRAL LIGHT 4.000K COLD LIGHT 6.500K

COMMON TECHNICAL DATA


Guarantee	3 YEARS
Energy classification	F+
Estimated useful life	50.000 hours
European legislation	CE, ROHS, IP44
Power (V)	220-240V / 50-60Hz
Kelvin	3.000K / 4.000K / 6.500K

REFERENCES | DIMENSIONS

○ BARI043/90NG

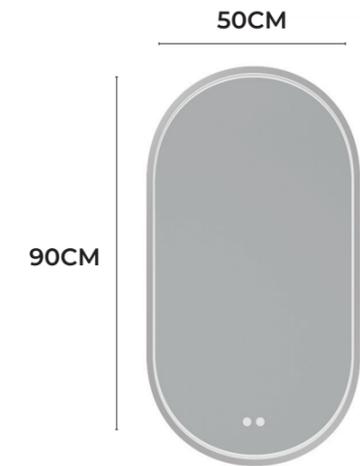

TECHNICAL SCHEME

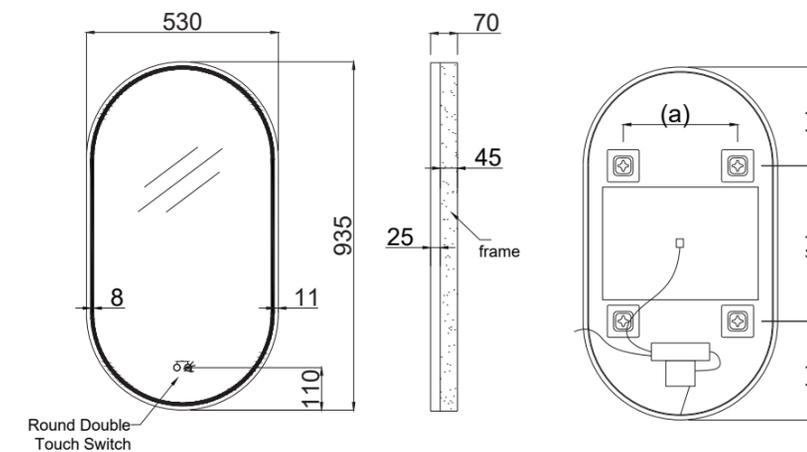

ANCHOR DIMENSIONS


REF.	MEASURES	a	b	c
BARI043/90NG	500x900MM	(294)	(431)	(252)

(*) The dimensions of the anchors and/or wall brackets may vary slightly depending on the production batches.

ANTI-FOG MEASUREMENTS

REF.	MEASURES
BARI043/90NG	(400 x 300)

SENSOR DETAIL

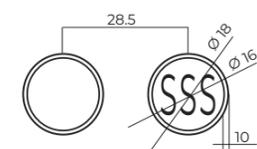

TECHNICAL DATA BY REFERENCE

EAN	REFERENCE	WEIGHT(KG) with packaging	LUMENS	POWER
8435668070218	BARI043/90NG	8,60	1200	24W



Palermo

SQUARE MIRROR
BACKLIGHT AND TOP LIGHT




3-Led

Palermo



Palermo

PRODUCT VALUES

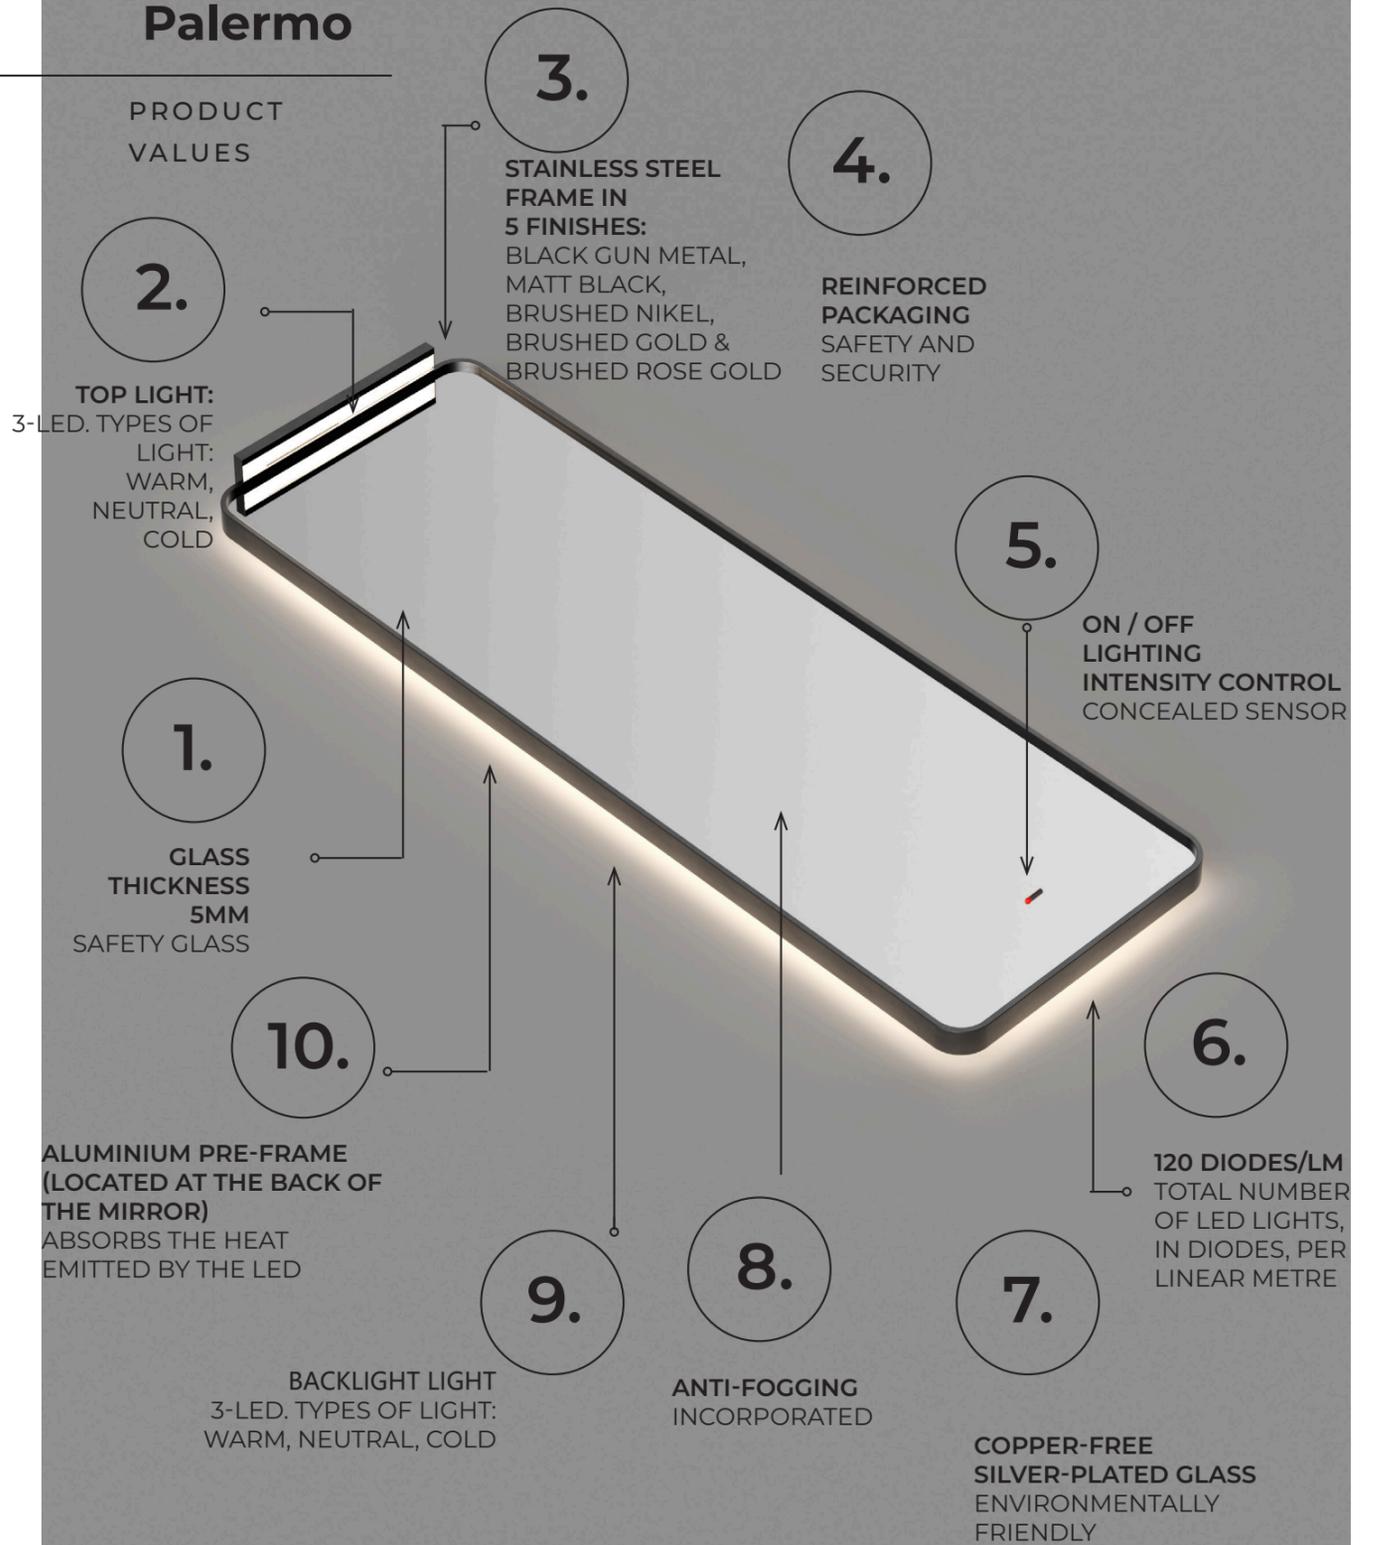

Palermo

SQUARE MIRROR | BACKLIGHT AND TOP LIGHT

PROFILE DETAILS



SENSORS (ILLUMINATION + ANTI-FOG)

SWITCH ON

DESCRIPTION



Square mirror with adjustable light intensity, upper and backlit around the perimeter of the rear frame.

Stainless steel frame available in five finishes:

black gun metal, matt black, brushed nickel, brushed gold and brushed rose gold.

Aluminium subframe on the rear of the mirror.

Single sensor: Lighting ON/OFF, intensity adjustment and built-in ANTI-FOG system.

3-Led technology. Three types of light (warm 3.000K, neutral 4.000K and cold 6.500K).




WARM LIGHT 3.000K


NEUTRAL LIGHT 4.000K

COLD LIGHT 6.500K

FINISHES (5 OPTIONS)

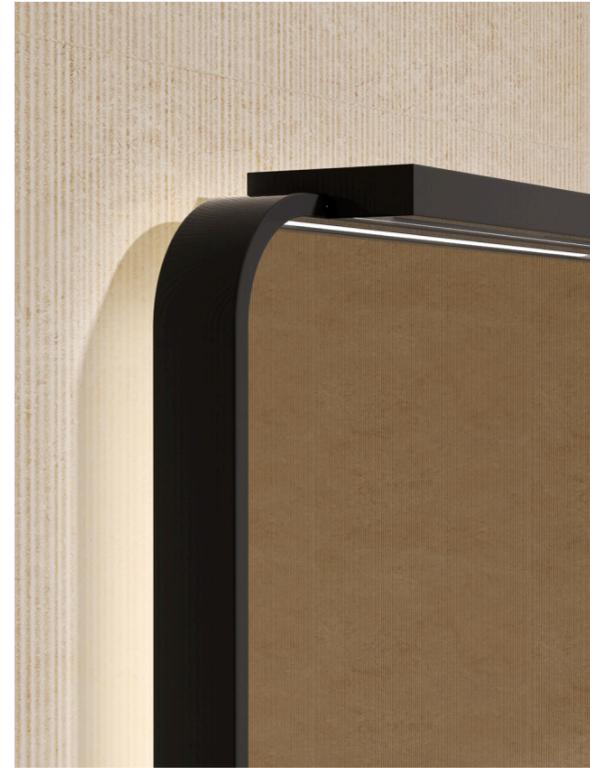

MATT BLACK

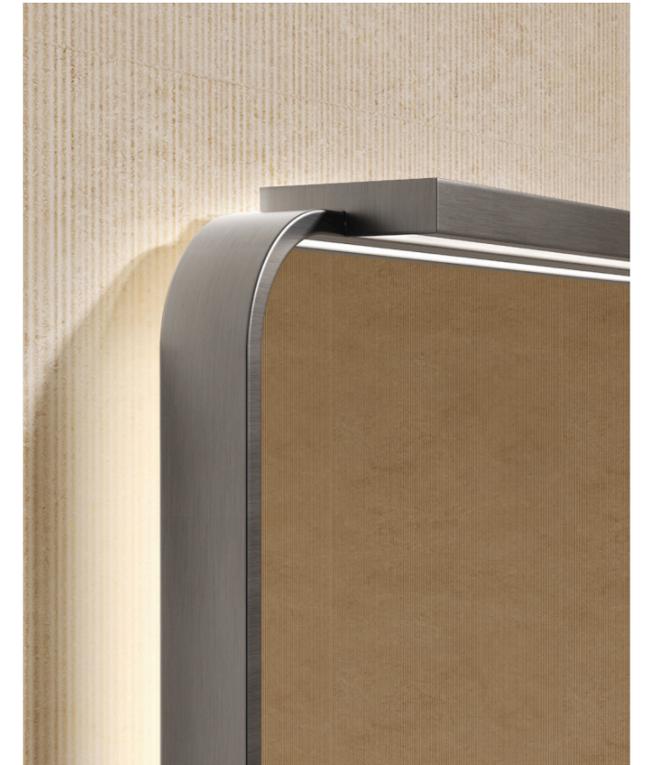

BRUSHED NICKEL



BLACK GUN METAL



BRUSHED GOLD




BRUSHED ROSE GOLD

Palermo

ROUND MIRROR | BACKLIGHT AND TOP LIGHT

TECHNICAL SCHEME

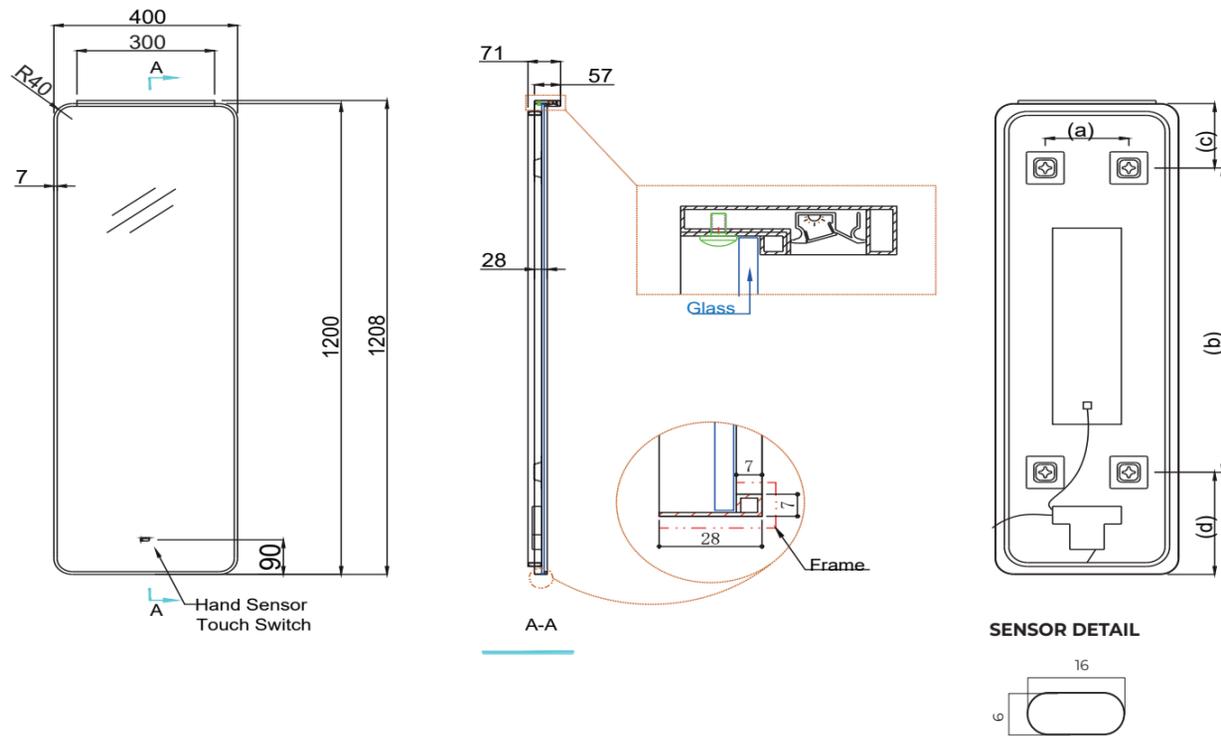

ANTI-FOG MEASUREMENTS

REF.	MEASURES
PALE044/120	(150 x 500)

ANCHOR DIMENSIONS

REF.	MEASURES	(a)	(b)	(c)	(d)
PALE044/120	400X1200	(182)	(872)	(164)	(260)

(*) The dimensions of the anchors and/or wall brackets may vary slightly depending on the production batches.

COMMON TECHNICAL DATA

Guarantee	3 YEARS
Energy classification	F+
Estimated useful life	50.000 hours
European legislation	CE, ROHS, IP44
Power (V)	220-240V / 50-60Hz
Kelvin	3.000K / 4.000K / 6.500K

FINISHES | REFERENCES | DIMENSIONS

- PALE044/120BGM
- PALE044/120NG
- PALE044/120NQ
- PALE044/120OC
- PALE044/120ORC



TECHNICAL DATA BY REFERENCE

EAN	REFERENCE	WEIGHT(KG) with packaging	LUMENS	POWER
8435668070164	PALE044/120BGM	10,40	960	24W
8435668070171	PALE044/120NG	10,40	960	24W
8435668070188	PALE044/120NQ	10,40	960	24W
8435668070195	PALE044/120OC	10,40	960	24W
8435668070201	PALE044/120ORC	10,40	960	24W

California

SQUARE MIRROR
BACKLIGHT LIGHT




3-Led

California



California


PRODUCT VALUES

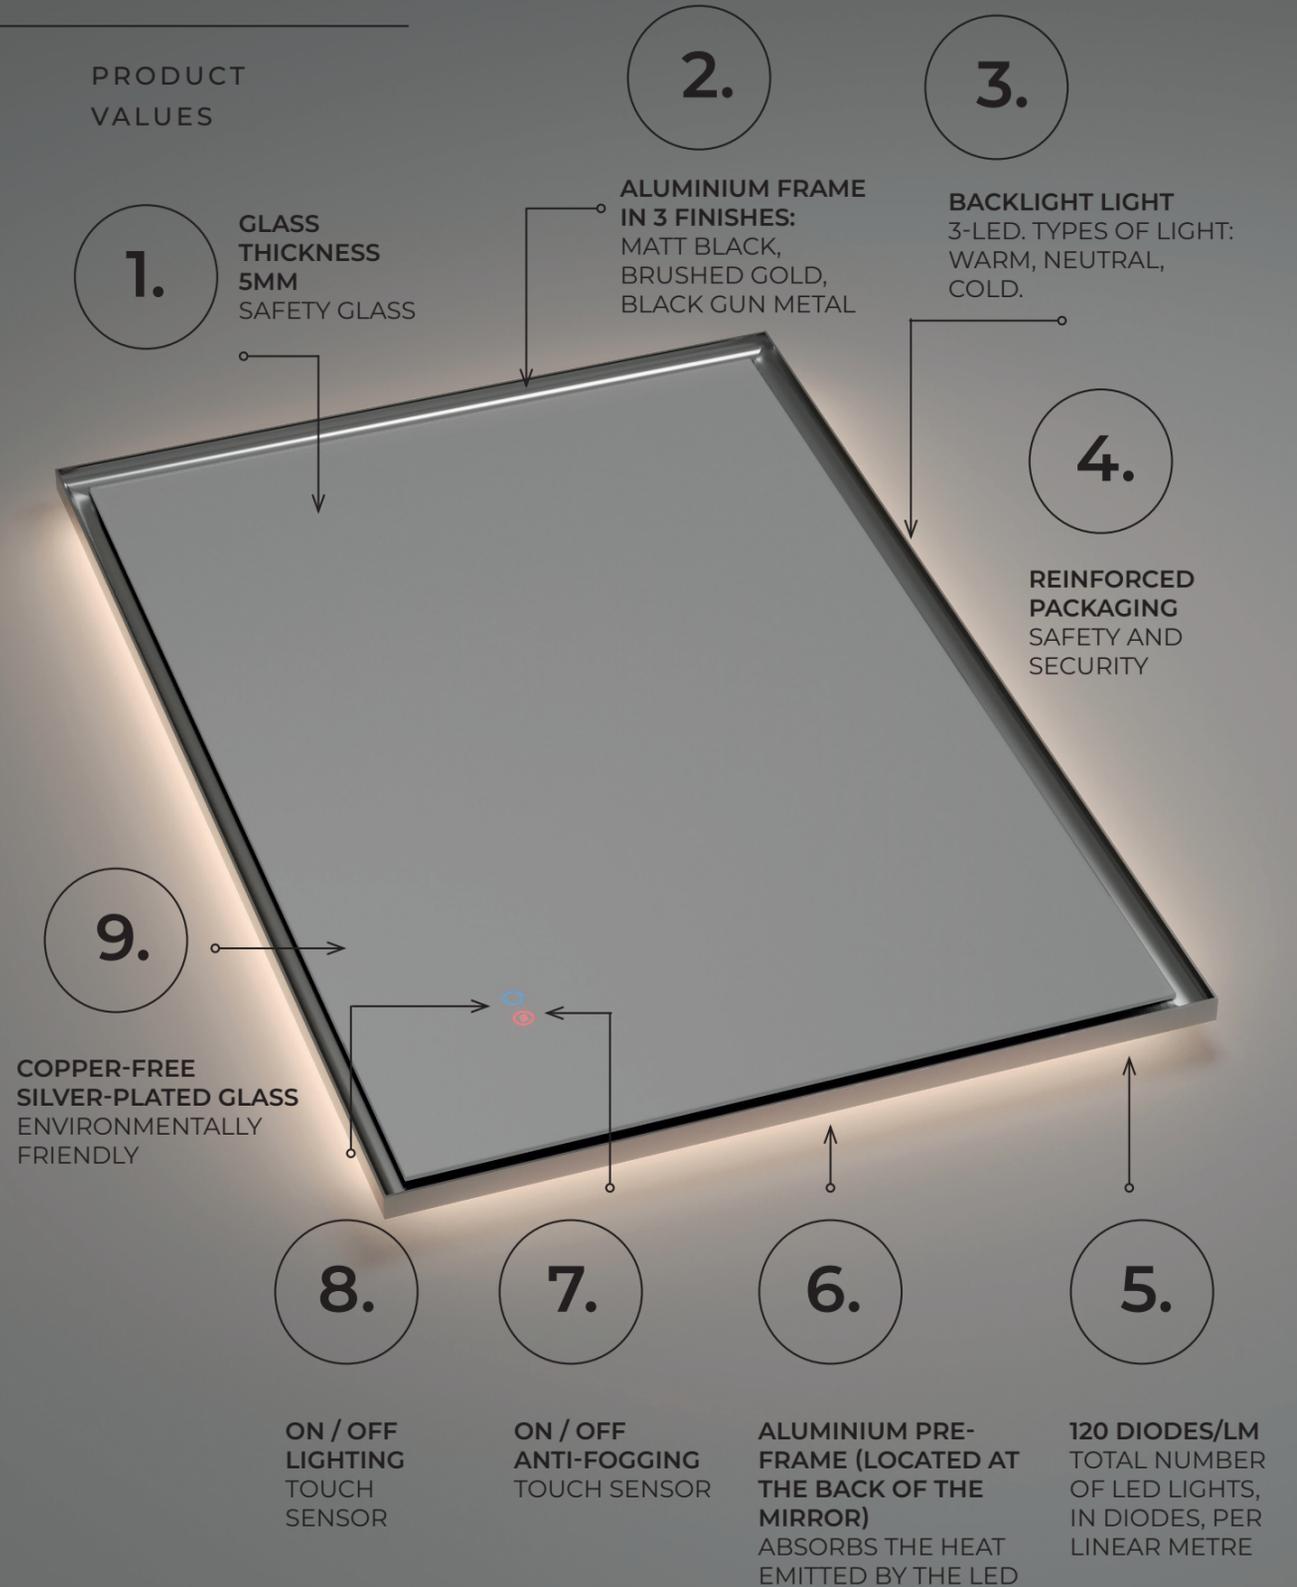

California

SQUARE MIRROR | BACKLIGHT LIGHT

FINISHES + DETAIL

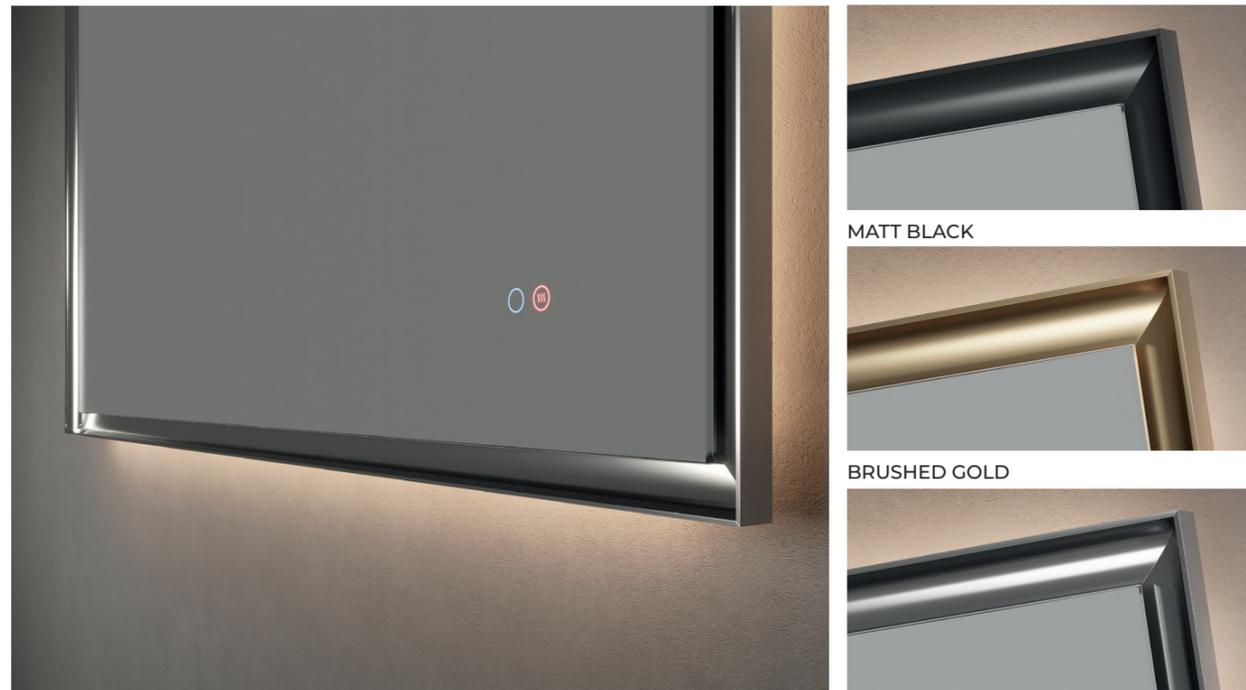

MATT BLACK

BRUSHED GOLD

BLACK GUN METAL

SENSORS (ILLUMINATION + ANTI-FOG)

DESCRIPTION

- Anti-fog sensor
- ON/OFF sensor
- Square mirrors
- 3-Led: warm, neutral and cold light
- Reinforced packaging

Square mirror with backlight light.

Stainless steel frame available in 3 finishes: matt black, Black gun metal and brushed gold.

Aluminium pre-frame on the back of the mirror.

Sensors: ON/OFF Lighting and ANTI-FOG system.

3-Led technology. Three types of light (warm 3.000K, neutral 4.000K and cold 6.500K).



WARM LIGHT 3.000K

NEUTRAL LIGHT 4.000K

COLD LIGHT 6.500K

COMMON TECHNICAL DATA


Guarantee	3 YEARS
Energy classification	F+
Estimated useful life	50.000 hours
European legislation	CE, ROHS, IP44
Power (V)	220-240V / 50-60Hz
Kelvin	3.000K / 4.000K / 6.500K

WATCH VIDEO




FINISHES | REFERENCES | DIMENSIONS

- | | | | | | |
|-----------------|----------------|-----------------|----------------|-----------------|----------------|
| BRUSHED GOLD | CALI034/100OC | BRUSHED GOLD | CALI034/120OC | BRUSHED GOLD | CALI034/140OC |
| MATT BLACK | CALI034/100NG | MATT BLACK | CALI034/120NG | MATT BLACK | CALI034/140NG |
| BLACK GUN METAL | CALI034/100BGM | BLACK GUN METAL | CALI034/120BGM | BLACK GUN METAL | CALI034/140BGM |

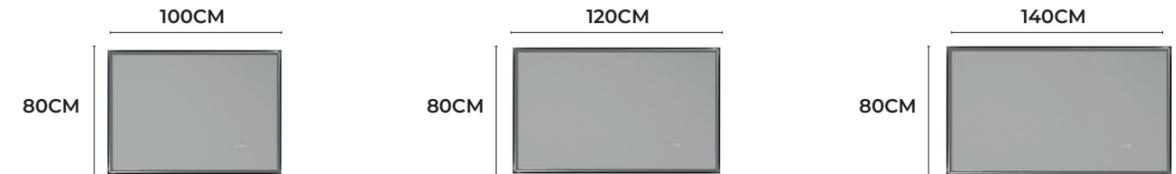


TECHNICAL SCHEME

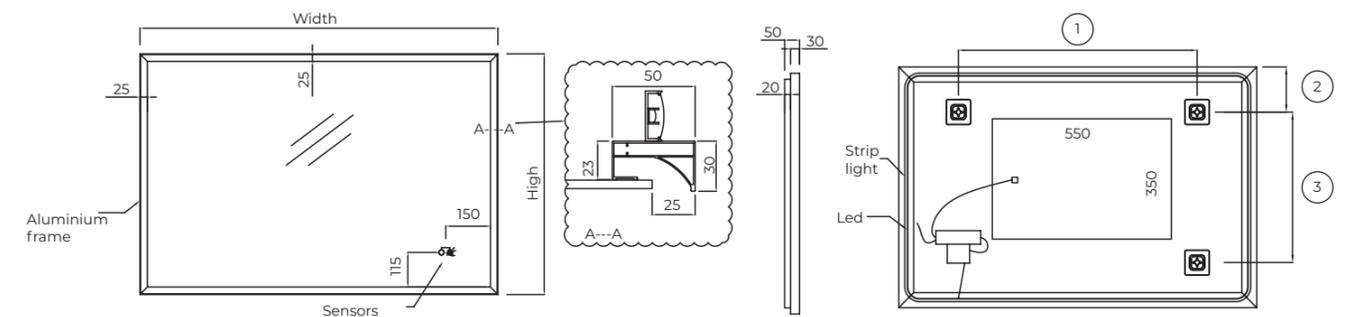

ANCHOR DIMENSIONS

REF.	MEASURES	1	2	3	ANTI-FOGGING
CALI034/100	1000X800MM	(600)	(150)	(500)	350X550MM
CALI034/120	1200X800MM	(800)	(150)	(500)	400X600MM
CALI034/140	1400X800MM	(900)	(150)	(500)	400X700MM

SENSOR DETAIL



(*) Can be installed horizontally, additional bracket on request when ordering.

TECHNICAL DATA BY REFERENCE



EAN	REFERENCE	WEIGHT(KG) with packaging	LUMENS	POWER
8435668043915	CALI034/100BGM	14,20	3960	24W
8435668043854	CALI034/100NG	14,20	3960	24W
8435668043885	CALI034/100OC	14,20	3960	24W
8435668043922	CALI034/120BGM	16,80	4440	24W
8435668043861	CALI034/120NG	16,80	4440	24W
8435668043892	CALI034/120OC	16,80	4440	24W
8435668043939	CALI034/140BGM	19,45	4920	36W
8435668043878	CALI034/140NG	19,45	4920	36W
8435668043908	CALI034/140OC	19,45	4920	36W

Iconography.

The language of Ledimex mirrors.

IDENTIFIES THE VALUES OF EACH PRODUCT

-  Anti-fog sensor
-  ON/OFF Sensor
-  Motion sensor
-  Oval mirrors
-  Square mirrors
-  Round mirrors
-  Magnifying mirror with light
-  Reinforced packaging
-  Dimmer
-  Wireless charger
-  Sequential ignition

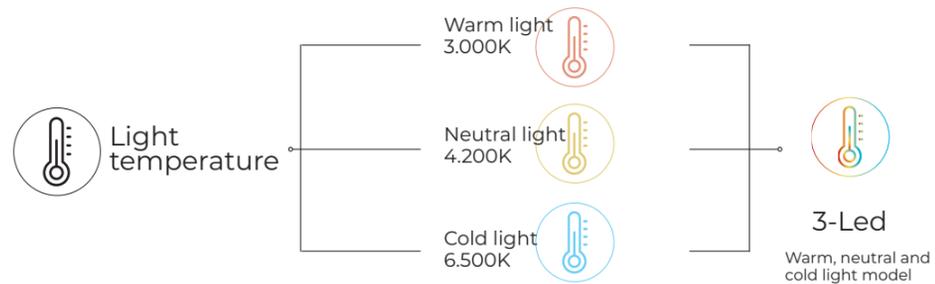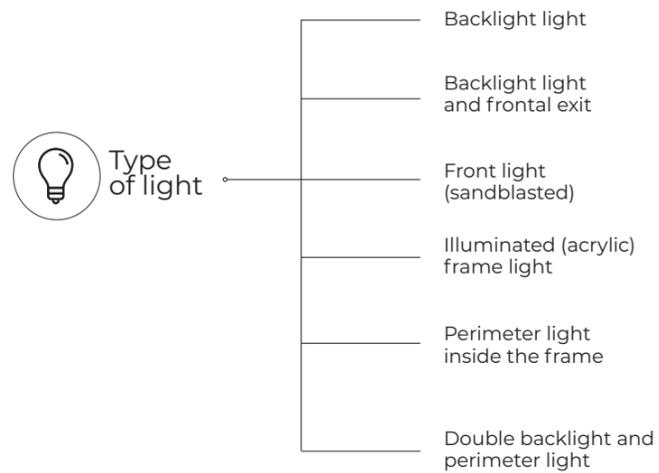

EXHIBITORS

DISPLAY STAND FOR 4 MIRRORS
80x80cm ó ø80cm.

BIFACIAL DISPLAY
2 SIDES

BUILT-IN POWER SOCKET CONNECTION
220V



GENERAL TERMS AND CONDITIONS OF SALE

DELIVERIES

Check the goods on receipt of the goods. No complaint will be accepted for goods not checked at the time of receipt. The carrier will indicate this on the delivery note.

RETURNS

LEDIMEX will not accept any return that has not been previously authorised by the technical team. Furthermore, in the event of a manufacturing defect, the packaging must be in perfect condition, otherwise a 10% surcharge will be applied to the invoice for reception, inspection and handling.

METHOD OF PAYMENT

A receipt will be issued through a bank. Maximum payment within 60 days of invoice date. Any non-payment will lead to the payment of the invoice plus all bank charges incurred and retention of all orders until payment of the same.

COURTS

In the event of litigation, both parties will submit to the courts of Picassent (Valencia).

TRANSPORT FEE

Consult shipping costs with export@ledimex.es

UPDATING AND MAINTENANCE OF COLLECTIONS

CHANGES IN MODELLING

On certain occasions, some articles supplied by LEDIMEX MIRRORS, S.L., may present changes, not substantial, in some of their components in relation to the photographs published in the current catalogue.

LEDIMEX MIRRORS, S.L., reserves the right to make such changes in its modelling always in order to improve the design and functionality of the product, as well as its sales conditions.

LEDIMEX

C/ N.º 6, PARCELA 11 P. INDUSTRIAL
46220 PICASSENT (VALENCIA)

Tel: (+34) 96 212 87 73
Tel. Orders: (+34) 618 663 428
Email Orders: export@ledimex.es
Email Administration: administracion@ledimex.es
Email Technical: sat@ledimex.es

Reproduction in whole or in part by any mechanical or photographic process without the permission of the company is strictly prohibited.

@LEDIMEX 2025

LEDIMEX

ABOUT MIRRORS