



**PRODUCT
INFORMATION
SUMMARY**




Ref.	EAN	Finish
BDC033-4	8435668010924	Chrome
BDC033-4NG	8435668010931	Matte black
BDC033-4ORC	8435668033831	Brushed rose gold
BDC033-4OC	8435668033824	Brushed gold

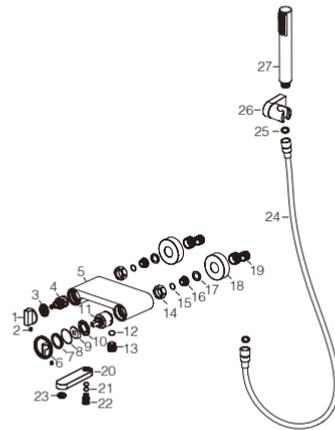


CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	Handle	Zinc		20	Spout	Brass	
2	Screw	SUS 304		21	O-ring	NBR	
3	Nut	Brass		22	Connect	Brass	
4	Cartridge	25mm up		23	Aerator	M24x1mm	SAT-AIR019*
5	Body	Brass		24	Hose	SUS 304	FLX004*
6	Handle	Zinc		25	Rubber washer	NBR	
7	Decorative ring	ABS		26	Shower seat	ABS	SMD007*
8	O-ring	NBR		27	Shower hand	ABS	MDR015*
9	Decorative cup	Brass					
10	Nut	Brass					
11	Cartridge	35mm up	CRT005*				
12	O-ring	NBR					
13	Connect	Brass					
14	Nut	Brass					
15	O-ring	NBR					
16	Valve	SUS 304					
17	Rubber washer	NBR					
18	Cover	SUS 304					
19	Cabrio leg	SUS 304					

* CONSULTAR PARA ACABADOS DE COLOR

Installing instruction



Step 1. Connect curved leg with the inlet pipe inside the wall



Step 2. Connect decorative cover to curved leg





Step 3. Install shower faucet properly, and connect to curved leg on the wall





Step 4. Test function of shower set, clean the set

Usage function instruction



FLOW RATE

Detalles	
FLOW RATE REF	BDC033-4
water outlet mixer water 0.1Mpa(L/MIN)	4.77
water outlet mixer water 0.3Mpa(L/MIN)	8.21
water outlet mixer water 0.5Mpa(L/MIN)	10.56
water outlet singer cold water 0.1Mpa(L/MIN)	4.7
water outlet singer cold water 0.3Mpa(L/MIN)	8.19
water outlet singer cold water 0.5Mpa(L/MIN)	10.49
hand shower mixer water 0.1Mpa(L/MIN)	5.66
hand shower mixer water 0.3Mpa(L/MIN)	10.2
hand shower mixer water 0.5Mpa(L/MIN)	13.83
hand shower singer cold water 0.1Mpa(L/MIN)	5.59
hand shower singer cold water 0.3Mpa(L/MIN)	10.1
hand shower singer cold water 0.5Mpa(L/MIN)	13.7

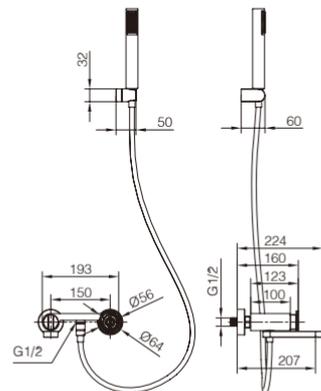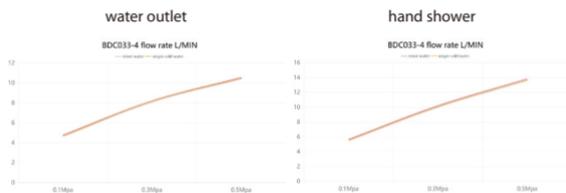

Product sizes (cm)	21.5*18*14
Weight (kg)	2.9
Guarantee	5 years
Max Preassure (bar)	5
Min Preassure (bar)	0.5
Optimum peassure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

