


# PRODUCT INFORMATION SUMMARY




Ref.	EAN	Finish
GPM039	8435668030106	Chrome
GPM039-BGM	8435668030113	Black gun metal
GPM039-NG	8435668030120	Matte black
GPM039-ORC	8435668030144	Brushed rose gold
GPM039-OC	8435668030137	Brushed gold
GPM039-NQ	8435668056632	Brushed nickel

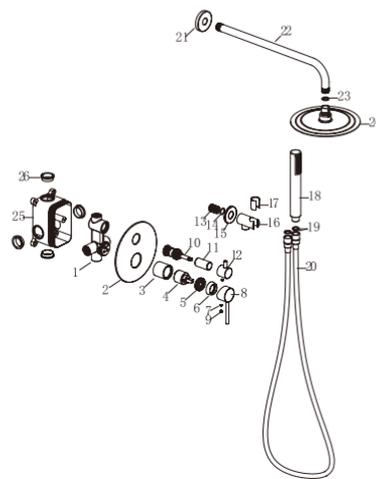

CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	Body	Brass		20	Hose	PVC	FLX002*
2	Decorative plate	SUS 304		21	Cover	SUS 304	
3	Cartridge cover	Brass		22	Hose	SUS 304	BPR001*
4	Cartridge	35mm	CRT006*	23	Rubber ring	NBR	
5	Nut	Brass		24	Shower head	SUS 304	RDN002*
6	Decorative cup	ABS		25	BOX	ABS	
7	Screw	SUS 304		26	Rubber ring	NBR	
8	Handle	Zinc					
9	Button	ABS					
10	Cartridge	Brass/27mm	CRT060*				
11	Cover	Brass					
12	Handle	Zinc					
13	Connect	Brass					
14	O-ring	NBR					
15	Cover	Brass					
16	Body	Brass					
17	Plastic washer	Plastic					
18	Shower	Plastic	MDR015*				
19	Rubber ring	NBR					

\* CONSULTAR PARA ACABADOS DE COLOR


### Installing instruction



Step 1. Connect curved leg with the inlet pipe inside the wall



Step 2. Connect decorative cover to curved leg



Step 3. Install shower faucet properly, and connect to curved leg on the wall



Step 4. Install shower pipe according to the distance of fix part





Step 5. Install shower hand and shower head to the set





Step 6. Test function of shower set, clean the set

### Usage function instruction



**FLOW RATE**

Detalles	
FLOW RATE REF	GPM039
hand shower mixer water 0.1Mpa(L/MIN)	5.85
hand shower mixer water 0.3Mpa(L/MIN)	10.74
hand shower mixer water 0.5Mpa(L/MIN)	14.43
hand shower singer cold water 0.1Mpa(L/MIN)	5.55
hand shower singer cold water 0.3Mpa(L/MIN)	10.05
hand shower singer cold water 0.5Mpa(L/MIN)	13.48
shower head mixer water 0.1Mpa(L/MIN)	5.87
shower head mixer water 0.3Mpa(L/MIN)	12.34
shower head mixer water 0.5Mpa(L/MIN)	15.75
shower head singer cold water 0.1Mpa(L/MIN)	6.1
shower head singer cold water 0.3Mpa(L/MIN)	11.58
shower head singer cold water 0.5Mpa(L/MIN)	15.37

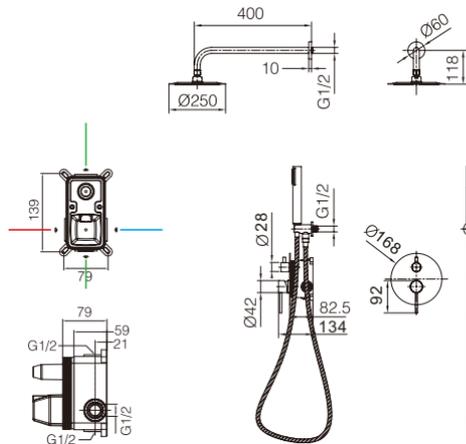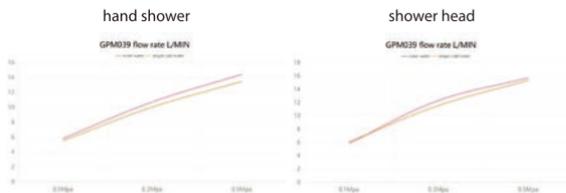

Product sizes (cm)	43*30*14
Weight (kg)	4.3
Guarantee	5 years
Max Preasure (bar)	5
Min Preasure (bar)	0.5
Optimum preasure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

**CERTIFIES**

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mandatory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: [www.imexproducts.es](http://www.imexproducts.es), releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specialists are excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

