


PRODUCT INFORMATION SUMMARY




Ref.	EAN	Finish
BTD038-4	8435668013406	Chrome
BTD038-4BGM	8435668013420	Black gun metal
BTD038-4NG	8435668013598	Matte black
BTD038-4GC	8435668013574	Matt gray/Champagne
BTD038-4ORC	8435668034852	Brushed rose gold
BTD038-4OC	8435668012485	Brushed gold
BTD038-4NQ	8435668012386	Brushed nickel

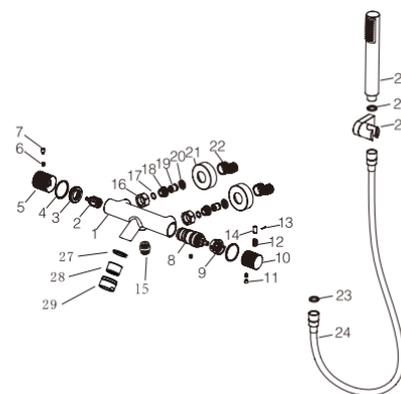


CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	Body	Brass		20	Rubber washer	NBR	
2	Cartridge	25mm up		21	Cover	SUS 304	
3	Nut	Brass		22	Cabrio leg	SUS 304	
4	Washer	POM		23	Rubber washer	NBR	
5	Handle	Brass		24	Hose	SUS 304 / PVC	FLX010*
6	Screw	SUS 304		25	Shower seat	ABS	SMD007*
7	Handle lever	Brass		26	Shower hand	ABS	MDR015*
8	Cartridge	32mm	CRT012*	27	Rubber washer	NBR	
9	Washer	POM		28	Aerator	24mm	
10	Handle	Brass		29	percolator	SUS 304	
11	Cover	ABS					
12	Spring	SUS 304					
13	Pin	SUS 304					
14	Handle lever	Brass					
15	Connect	Brass					
16	Nut	Brass					
17	O-ring	NBR					
18	Screw	SUS 304					
19	Valve	ABS					

* CONSULTAR PARA ACABADOS DE COLOR

Installing instruction



Step 1. Connect curved leg with the inlet pipe inside the wall



Step 2. Connect decorative cover to curved leg





Step 3. Install shower faucet properly, and connect to curved leg on the wall





Step 4. Test function of shower set, clean the set

Usage function instruction



FLOW RATE

Detalles	
FLOW RATE REF	BTD038-4
water outlet mixer water 0.1Mpa(L/MIN)	10.48
water outlet mixer water 0.3Mpa(L/MIN)	18.37
water outlet mixer water 0.5Mpa(L/MIN)	24.02
water outlet singer cold water 0.1Mpa(L/MIN)	9.65
water outlet singer cold water 0.3Mpa(L/MIN)	17.04
water outlet singer cold water 0.5Mpa(L/MIN)	22.2
hand shower mixer water 0.1Mpa(L/MIN)	6.05
hand shower mixer water 0.3Mpa(L/MIN)	11.24
hand shower mixer water 0.5Mpa(L/MIN)	15.2
hand shower singer cold water 0.1Mpa(L/MIN)	5.82
hand shower singer cold water 0.3Mpa(L/MIN)	10.8
hand shower singer cold water 0.5Mpa(L/MIN)	14.6

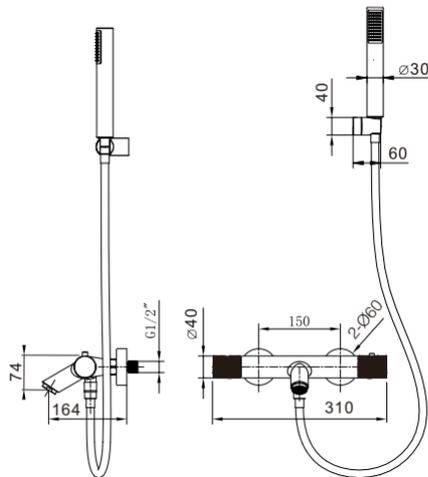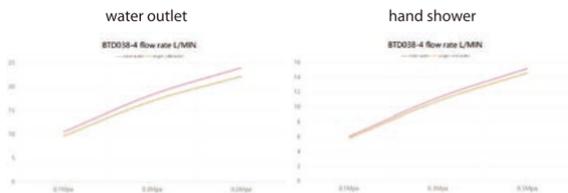

Product sizes (cm)	33*19.5*10.5
Weight (kg)	2.7
Guarantee	5 years
Max Preassure (bar)	5
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mandatory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specialists are excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

