


**PRODUCT
INFORMATION
SUMMARY**




Ref.	EAN	Finish
BDR001	8435668002240	Chrome
BDR001/NG	8435668002264	Matte black
BDR001/OC	8435668034357	Brushed gold
BDR001/ORC	8435668034364	Brushed rose gold

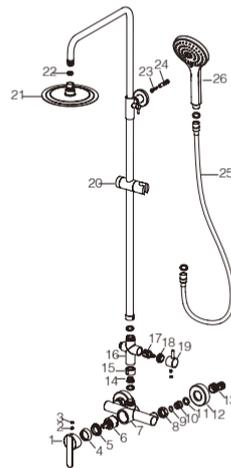


CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	Handle	Zinc		20	Pipe	SUS 304	RR0014*
2	Screw	SUS 304		21	Shower head	SUS 304	RDN001*
3	Button	ABS		22	Rubber washer	NBR	
4	Decorative cover	ABS		23	Screw	SUS 304	
5	Nut	Brass		24	Expansion bolt	PA	
6	Cartridge	35mm	CRT006*	25	Hose	SUS 304/PVC	FLX002*
7	Body	Brass		26	Shower hand	ABS	MDR001*
8	Nut	Brass					
9	O-ring	NBR					
10	Valve	SUS 304					
11	Rubber washer	NBR					
12	Cover	SUS 304					
13	Cabrio leg	SUS 304					
14	Connect	SUS 304					
15	Nut	Brass					
16	Body	Brass	RR0002*				
17	Cartridge	22mm					
18	Nut	Brass					
19	Handle	Zinc					

* CONSULTAR PARA ACABADOS DE COLOR

Installing instruction



Step 1. Connect curved leg with the inlet pipe inside the wall



Step 2. Connect decorative cover to curved leg



Step 3. Install shower faucet properly and connect to curved leg on the wall



Step 4. Install shower pipe according to the distance of fix part





Step 5. Install shower hand and shower head to the set



Step 6. Test function of shower set, clean the set

Usage function instruction






FLOW RATE

Detalles	
FLOW RATE REF	BDR001
hand shower mixer water 0.1Mpa(L/MIN)	5.81
hand shower mixer water 0.3Mpa(L/MIN)	10.46
hand shower mixer water 0.5Mpa(L/MIN)	14.08
hand shower singer cold water 0.1Mpa(L/MIN)	5.68
hand shower singer cold water 0.3Mpa(L/MIN)	10.23
hand shower singer cold water 0.5Mpa(L/MIN)	13.75
shower head mixer water 0.1Mpa(L/MIN)	6.49
shower head mixer water 0.3Mpa(L/MIN)	11.59
shower head mixer water 0.5Mpa(L/MIN)	15.49
shower head singer cold water 0.1Mpa(L/MIN)	6.28
shower head singer cold water 0.3Mpa(L/MIN)	11.29
shower head singer cold water 0.5Mpa(L/MIN)	14.76

hand shower

shower head

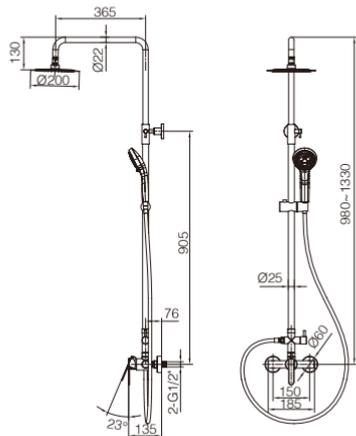

Product sizes (cm)	42.5*13.3*90
Weight (kg)	5.2
Guarantee	5 years
Max Preassure (bar)	5
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

