


**PRODUCT
INFORMATION
SUMMARY**



Ref.	EAN	Finish
GLD038	8435668011426	Chrome
GLD038-BGM	8435668012096	Black gun metal
GLD038-NG	8435668011457	Matte black
GLD038-GC	8435668011433	Matt gray/Champagne
GLD038-ORC	8435668035170	Brushed rose gold
GLD038-OC	8435668011471	Brushed gold
GLD038-NQ	8435668011464	Brushed nickel

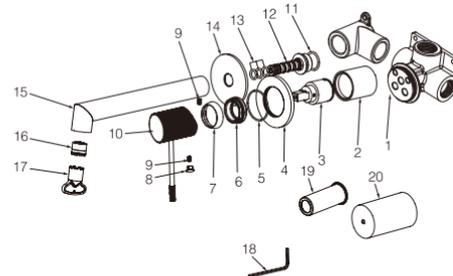


CODE	NAME	MATERIAL	REF
1	Main body	Brass	
2	Decorative tube	Brass	
3	Cartridge	25mm	CRT018*
4	Handle cover board	Brass	
5	O-ring	NBR	
6	Cartridge cover	Brass	
7	Decorative cover	Brass	
8	Button	ABS	
9	Screw M5,L=5	SUS 304	
10	Handle	Brass	
11	O-ring	NBR	
12	Connector	Brass	
13	O-ring	NBR	
14	Spout cover board	Brass	
15	Spout	Brass	
16	Aerator	16.5mm	SAT-AIR060*
17	Aerator key	Plastic	SAT-KEY005*
18	Allen key	SUS 304	
19	Protective cover	Plastic	
20	Protective cover	Plastic	

* CONSULTAR PARA ACABADOS DE COLOR


Installing instruction




- Step 1. Check all spare parts
- 1-pipe
 - 2-body to handle
 - 3-handle
 - 4-cover plate of handle
 - 5-cover plate of pipe
 - 6-body to pipe
 - 7-Connector
 - 8-Spare part bag



- Step 2. Dig hole for body to handle
- 2.1-Hole size 50*50mm, depth from 45 to 75mm
 - 2.2-Dig two 6mm holes with 54mm distance
 - 2.3- Assemble spare parts as picture shows




- Step 3. Dig hole for body to pipe
- 3.1-Hole size 45*45mm, depth 40mm
 - 3.2-Dig two 6mm holes with 35mm distance
 - 3.3- Assemble spare parts as picture shows



- Step 4. Connect inside pipe and test for leak checking



Usage function instruction



21°

FLOW RATE

Detalles	
FLOW RATE REF	GLD038
mixer water 0.1Mpa(L/MIN)	4.51
mixer water 0.3Mpa(L/MIN)	7.67
mixer water 0.5Mpa(L/MIN)	9.89
singer cold water 0.1Mpa(L/MIN)	4.86
singer cold water 0.3Mpa(L/MIN)	8.27
singer cold water 0.5Mpa(L/MIN)	10.6

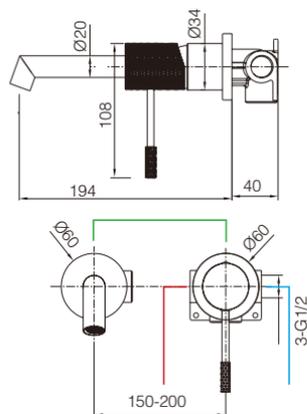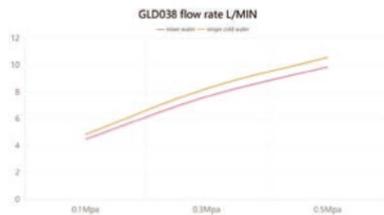

Product sizes (cm)	29*17.5*6.7
Weight (kg)	1
Guarantee	5 years
Max Preassure (bar)	5
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mandatory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that an IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specialists are excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

