


# PRODUCT INFORMATION SUMMARY




| Ref.        | EAN           | Finish          |
|-------------|---------------|-----------------|
| BDAR025     | 8435668002431 | Chrome          |
| BDAR025-BGM | 8435668037730 | Black gun metal |
| BDAR025-NG  | 8435668002547 | Matte black     |
| BDAR025-OC  | 8435668037747 | Brushed gold    |
| BDAR025-BL  | 8435668002530 | Matt white      |

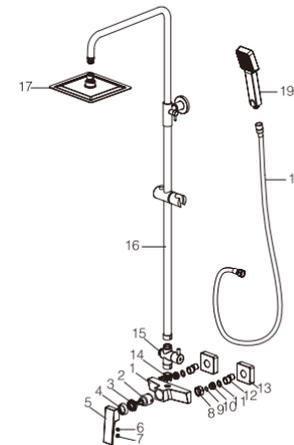


| CODE | NAME       | MATERIAL | REF     | CODE | NAME        | MATERIAL      | REF      |
|------|------------|----------|---------|------|-------------|---------------|----------|
| 1    | body       | brass    |         | 16   | pipe        | SUS 304       | RR001*   |
| 2    | cartridge  | 35mm     | CRT001* | 17   | shower head | SUS 304       | RDC001*  |
| 3    | nut        | brass    |         | 18   | hose        | SUS 304 / PVC | FLX005*  |
| 4    | cover      | ABS      |         | 19   | shower hand | ABS           | MDDR001* |
| 5    | handle     | Zinc     |         |      |             |               |          |
| 6    | screw      | SUS 304  |         |      |             |               |          |
| 7    | cover      | ABS      |         |      |             |               |          |
| 8    | nut        | brass    |         |      |             |               |          |
| 9    | O-ring     | NBR      |         |      |             |               |          |
| 10   | screw      | SUS 304  |         |      |             |               |          |
| 11   | rubber     | NBR      |         |      |             |               |          |
| 12   | cabrio leg | SUS 304  |         |      |             |               |          |
| 13   | cover      | SUS 304  |         |      |             |               |          |
| 14   | connect    | brass    |         |      |             |               |          |
| 15   | diverter   | brass    |         |      |             |               |          |

\* CONSULTAR PARA ACABADOS DE COLOR

## shower set installing instruction



Step 1. Connect curved leg with the inlet pipe inside the wall




Step 2. Connect decorative cover to curved leg



Step 3. Install shower faucet properly and connect to curved leg on the wall



Step 4. Install shower pipe according to the distance of fix part





Step 5. Install shower hand and shower head to the set



Step 6. Test function of shower set, clean the set


## Usage function instruction





## FLOW RATE

| Detalles                                    |         |
|---|---------|
| FLOW RATE REF                               | BDAR025 |
| hand shower mixer water 0.1Mpa(L/MIN)       | 6.2     |
| hand shower mixer water 0.3Mpa(L/MIN)       | 11.34   |
| hand shower mixer water 0.5Mpa(L/MIN)       | 15.23   |
| hand shower singer cold water 0.1Mpa(L/MIN) | 6.16    |
| hand shower singer cold water 0.3Mpa(L/MIN) | 11.19   |
| hand shower singer cold water 0.5Mpa(L/MIN) | 15.06   |
| shower head mixer water 0.1Mpa(L/MIN)       | 6.23    |
| shower head mixer water 0.3Mpa(L/MIN)       | 11.24   |
| shower head mixer water 0.5Mpa(L/MIN)       | 14.9    |
| shower head singer cold water 0.1Mpa(L/MIN) | 6.19    |
| shower head singer cold water 0.3Mpa(L/MIN) | 11.12   |
| shower head singer cold water 0.5Mpa(L/MIN) | 14.81   |

hand shower



shower head

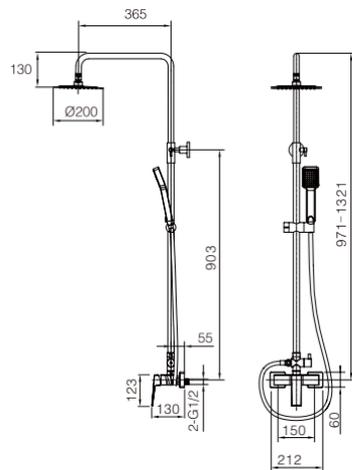

|                         |                     |
|-------------------------|---------------------|
| Product sizes (cm)      | 42.5*13.3*90        |
| Weight (kg)             | 5.5                 |
| Guarantee               | 5 years             |
| Max Preassure (bar)     | 5                   |
| Min Preassure (bar)     | 0.5                 |
| Optimum preassure (bar) | 1-4 (Recommended 3) |
| Max. temperature        | 85°C                |
| Min temperature         | 65°C                |

## CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mandatory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: [www.imexproducts.es](http://www.imexproducts.es), releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specialists are excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

