


**PRODUCT
INFORMATION
SUMMARY**



| Ref. | EAN | Finish |
|-------------|---------------|-------------------|
| BDC033-5 | 8435668010955 | Chrome |
| BDC033-SNG | 8435668010962 | Matte black |
| BDC033-SORC | 8435668033855 | Brushed rose gold |
| BDC033-SOC | 8435668033848 | Brushed gold |

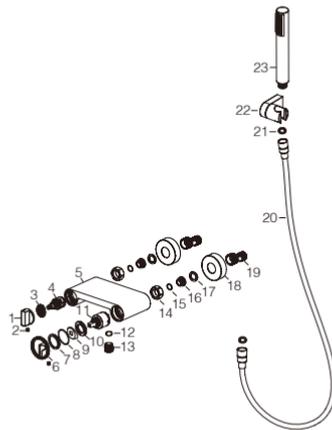

| CODE | NAME | MATERIAL | REF | CODE | NAME | MATERIAL | REF |
|------|-----------------|----------|---------|------|---------------|----------|---------|
| 1 | Handle | Zinc | | 20 | Hose | SUS 304 | FLX004* |
| 2 | Screw | SUS 304 | | 21 | Rubber washer | NBR | |
| 3 | Nut | Brass | | 22 | Shower seat | ABS | SMD007* |
| 4 | Cartridge | 25mm up | | 23 | Shower hand | ABS | MDR015* |
| 5 | Body | Brass | | | | | |
| 6 | Handle | Zinc | | | | | |
| 7 | Decorative ring | ABS | | | | | |
| 8 | O-ring | NBR | | | | | |
| 9 | Decorative cap | Brass | | | | | |
| 10 | Nut | Brass | | | | | |
| 11 | Cartridge | 35mm up | CRT005* | | | | |
| 12 | O-ring | NBR | | | | | |
| 13 | Connect | Brass | | | | | |
| 14 | Nut | Brass | | | | | |
| 15 | O-ring | NBR | | | | | |
| 16 | Valve | SUS 304 | | | | | |
| 17 | Rubber washer | NBR | | | | | |
| 18 | Cover | SUS 304 | | | | | |
| 19 | Cabrio leg | SUS 304 | | | | | |

* CONSULTAR PARA ACABADOS DE COLOR

Installing instruction

Step 1. Connect curved leg with the inlet pipe inside the wall

Step 2. Connect decorative cover to curved leg



Step 3. Install shower faucet properly, and connect to curved leg on the wall

Step 4. Test function of shower set, clean the set

Usage function instruction

FLOW RATE

| Detalles | |
|------------------------------------|----------|
| FLOW RATE REF | BDC033-5 |
| mixer water 0.1Mpa(L/MIN) | 5.7 |
| mixer water 0.3Mpa(L/MIN) | 10.65 |
| mixer water 0.5Mpa(L/MIN) | 14.38 |
| singer cold water 0.1Mpa(L/MIN) | 5.79 |
| singer cold water 0.3Mpa(L/MIN) | 10.57 |
| singer cold water 0.5Mpa(L/MIN) | 14.3 |

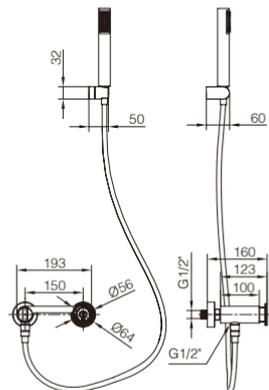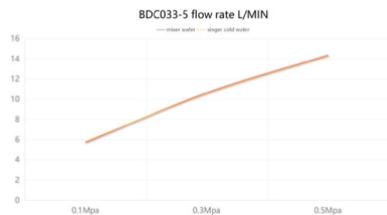

| | |
|-------------------------|---------------------|
| Product sizes (cm) | 21.5*18*14 |
| Weight (kg) | 2.5 |
| Guarantee | 5 years |
| Max Preassure (bar) | 5 |
| Min Preassure (bar) | 0.5 |
| Optimum preassure (bar) | 1-4 (Recommended 3) |
| Max. temperature | 85°C |
| Min temperature | 65°C |

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

