


# PRODUCT INFORMATION SUMMARY




Ref.	EAN	Finish
BDAR025-4	8435668037815	Chrome
BDAR025-4BGM	8435668037822	Black gun metal
BDAR025-4NG	8435668037846	Matte black
BDAR025-4OC	8435668037853	Brushed gold
BDAR025-4BL	8435668037839	Matt white

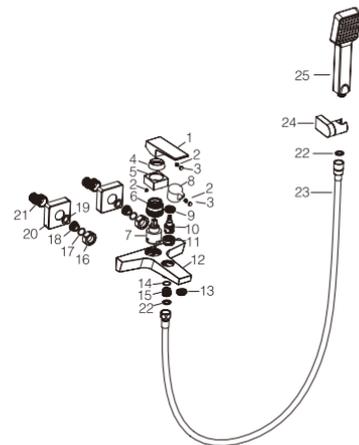


CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	Handle	zinc		20	rubber	NBR	
2	screw	SUS 304		21	Cabrio leg	SUS 304	
3	button	ABS		22	rubber	NBR	
4	decorative cover	ABS		23	hose	SUS 304 / PVC	FLX010*
5	decorative base	Brass		24	shower seat	ABS	SMD007*
6	nut	brass		25	shower hand	ABS	MDL001*
7	Cartridge	35mm	CRT006*				
8	Handle	zinc					
9	nut	Brass					
10	Cartridge	22mm					
11	connect	Brass					
12	body	Brass					
13	aerator	24X1mm	SAT-AIR019*				
14	O-ring	NBR					
15	connect	Brass					
16	Nut	Brass					
17	O-ring	NBR					
18	Screw	SUS 304					
19	Cover	SUS 304					

\* CONSULTAR PARA ACABADOS DE COLOR


## shower set installing instruction




Step 1. Connect curved leg with the inlet pipe inside the wall



Step 2. Connect decorative cover to curved leg





Step 3. Install shower faucet properly, and connect to curved leg on the wall



Step 4. Test function of shower set, clean the set



## Usage function instruction



WATER FAUCET 180° SHOWER HAND

## FLOW RATE

Detailles	
FLOW RATE REF	BDAR025-4
water outlet mixer water 0.1Mpa(L/MIN)	5
water outlet mixer water 0.3Mpa(L/MIN)	8.6
water outlet mixer water 0.5Mpa(L/MIN)	11.08
water outlet singer cold water 0.1Mpa(L/MIN)	5
water outlet singer cold water 0.3Mpa(L/MIN)	8.53
water outlet singer cold water 0.5Mpa(L/MIN)	10.98
hand shower mixer water 0.1Mpa(L/MIN)	6.42
hand shower mixer water 0.3Mpa(L/MIN)	11.68
hand shower mixer water 0.5Mpa(L/MIN)	15.75
hand shower singer cold water 0.1Mpa(L/MIN)	6.36
hand shower singer cold water 0.3Mpa(L/MIN)	11.55
hand shower singer cold water 0.5Mpa(L/MIN)	15.58

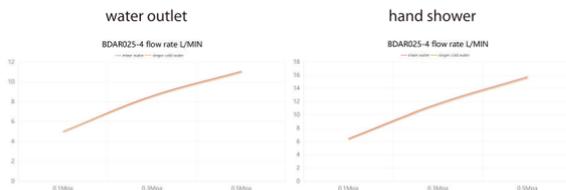

Product sizes (cm)	21.5*18*14
Weight (kg)	2.3
Guarantee	5 years
Max Preassure (bar)	5
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

## CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

### Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: [www.imexproducts.es](http://www.imexproducts.es), releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

