


**PRODUCT  
INFORMATION  
SUMMARY**



Ref.	EAN	Finish
BDR001-4	8435668005517	Chrome
BDR001-4NG	8435668034456	Matte black
BDR001-4OC	8435668034463	Brushed gold
BDR001-4ORC	8435668034470	Brushed rose gold

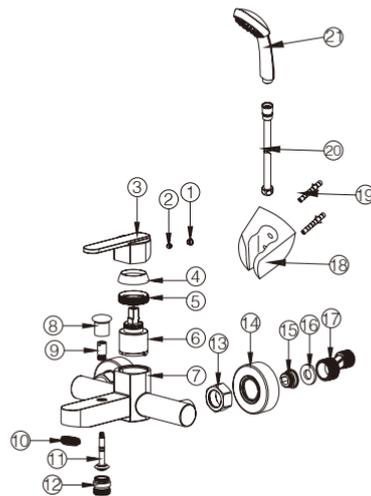


CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	Button	ABS		12	Connect or	SUS 304	
2	Screw	SUS 304		13	Hexagon nut	H59	
3	Handle	zinc		14	plate	SUS 304	
4	Decorative cup	H59		15	Screw	SUS 316	
5	Two stage cup	H59		16	Flat gasket	NBR	
6	Cartridge	35mm	CRT006*	17	Cabriole	SUS 304	
7	Faucet body	Brass		18	Shower seat	ABS	SMD007*
8	Handle	Brass		19	Connector	ABS	
9	Connect	SUS 304		20	Shower hose	SUS 304	FLX010*
10	Aerator	ABS/M24X1mm	SAT-AIR019*	21	Shower hand	ABS	MDR001*
11	Lift rod	SUS 304					


\* CONSULTAR PARA ACABADOS DE COLOR

**Installing instruction**


Before installing this product, an installation groove needs to be excavated on the wall.  
(1) Select a suitable installation location in the bathroom.  
(2) Slot according to the diagram.  
(3) Install the inlet pipe (hot water on the left, cold water on the right).



(4) Lay ceramic tiles.  
(5) The water outlet is slightly lower than the tile surface.



(6) Install the curved foot (wrap the raw material tape around the thread).



(7) Install the curved foot cup.



(8) Install the main body.





After locking, check for any leaks

(8) Main accessories.



### FLOW RATE

Detalles	
FLOW RATE REF	BDAR025
hand shower mixer water 0.1Mpa(L/MIN)	4.2
hand shower mixer water 0.3Mpa(L/MIN)	11.3
hand shower mixer water 0.5Mpa(L/MIN)	17
hand shower singer cold water 0.1Mpa(L/MIN)	3.6
hand shower singer cold water 0.3Mpa(L/MIN)	9.5
hand shower singer cold water 0.5Mpa(L/MIN)	13.7
bath mixer water0.1Mpa(L/MIN)	5.5
bath mixer water0.3Mpa(L/MIN)	13.5
bath mixer water0.5Mpa(L/MIN)	18.8
bath single cold water0.1Mpa(L/MIN)	4.3
bath single cold water0.3Mpa(L/MIN)	11
bath single cold water0.5Mpa(L/MIN)	14.8

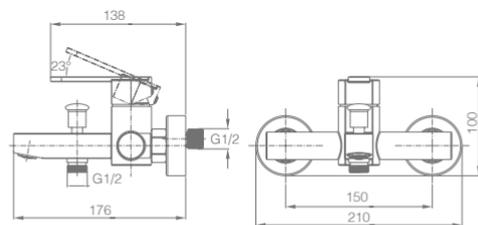

Product sizes (cm)	42.5*13.3*90
Weight (kg)	0.935
Guarantee	5 years
Max Preassure (bar)	5
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

### CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

#### Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: [www.imexproducts.es](http://www.imexproducts.es), releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

