


**PRODUCT
INFORMATION
SUMMARY**




Ref.	EAN	Finish
GLM039	8435668030663	Chrome
GLM039-BGM	8435668030670	Black gun metal
GLM039-NG	8435668030687	Matte black
GLM039-ORC	8435668030700	Brushed rose gold
GLM039-OC	8435668030694	Brushed gold
GLM039-NQ	8435668056618	Brushed nickel

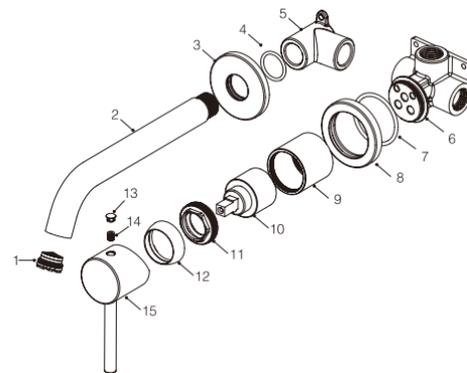


CODE	NAME	MATERIAL	REF
1	Aerator	16.5x1mm	SAT-AIR060*
2	Outlet pipe	Brass	
3	Cover	Brass	
4	O-ring	NBR	
5	Connector	Brass	
6	Body	Brass	
7	O-ring	NBR	
8	Cover	Brass	
9	Cartridge cover	Brass	
10	Cartridge	35mm	CRT006*
11	Nut	Brass	
12	Cover	ABS	
13	Screw	SUS 304	
14	Cover	ABS	
15	Handle	Zinc	

* CONSULTAR PARA ACABADOS DE COLOR


Installing instruction




- Step 1. Check all spare parts
 1-pipe
 2-body to handle
 3-handle
 4-cover plate of handle
 5-cover plate of pipe
 6-body to pipe
 7-spare part bag



- Step 2. Dig hole for body to handle
 2.1-Hole size 50*50mm, depth from 45 to 75mm
 2.2-Dig two 6mm holes with 54mm distance
 2.3- Assemble spare parts as picture shows





- Step 3. Dig hole for body to pipe
 3.1-Hole size 45*45mm, depth 40mm
 3.2-Dig two 6mm holes with 35mm distance
 3.3- Assemble spare parts as picture shows






- Step 4. Connect inside pipe and test for leak checking

Usage function instruction



FLOW RATE

Detalles	
FLOW RATE REF	GLM039
mixer water 0.1Mpa(L/MIN)	5.46
mixer water 0.3Mpa(L/MIN)	9.49
mixer water 0.5Mpa(L/MIN)	12.31
singer cold water 0.1Mpa(L/MIN)	5.3
singer cold water 0.3Mpa(L/MIN)	9.08
singer cold water 0.5Mpa(L/MIN)	11.77

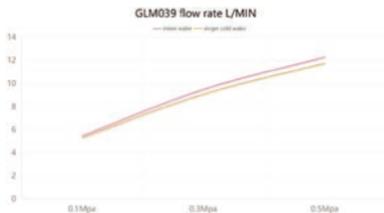

Product sizes (cm)	29*17.5*6.7
Weight (kg)	1.1
Guarantee	5 years
Max Preasure (bar)	5
Min Preasure (bar)	0.5
Optimum preasure (bar)	1-4 (Recommended 3)
Max. temperature	85°C
Min temperature	65°C

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mandatory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assembly, maintenance or repairs carried out by non-specialists are excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

